



Gfp **Graphic Finishing**
partners

Where Finishing Comes First.

Gfp 300 Series

Top Heat Laminators

Sign shops and digital printers now have an affordable option for pressure-sensitive applications. The Gfp 300 Series delivers rugged construction, labor-saving features, and high quality output in an entry level machine. Built off the 255C Cold Laminator, the 300 Series adds top heat for better overlamination, mounting and board coating results.

FULLY FEATURED

Produce Professional results

PRODUCTIVE

Roll-to-Roll capability

EASY LOADING

3" Aluminum Quick-Grip shafts

RUGGED DESIGN

Metal Alloy heaters

VERSATILE

Lots of popular applications



overlamination • mounting • board pre-coating

Easy set-up and low maintenance with a top heat boost.




- Labor saving Quick-Grip film shafts
- Integrated rear rewind for roll-to-roll apps
- Swing-up feed table and 38" output height
- Photoelectric eye for operator safety
- Metal Alloy heater reduces breakage
- 5" diameter rollers



Integrated Rear Rewind makes Roll-to-Roll applications easy.

Media Alignment Disks prevent media supply roll from telescoping during operation. (Included)

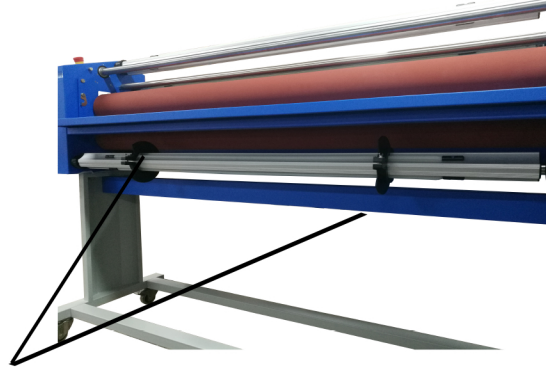

Rugged Design
Professional Quality
Proven Performance
Economically Priced

APPLICATIONS

- Signs*
- Banners*
- Trade show displays*
- Point-of-purchase*
- Dry-erase boards*
- Floor graphics*
- Graphic mounting*
- Photo mounting*
- Window graphics*
- Vehicle graphics*

355TH

363TH

| | | |
|---------------------------------------|--------------------------|--------------------------|
| <i>Laminating Width</i> | 55" | 63" |
| <i>Roller Diameter</i> | 5" | |
| <i>Roller Gap</i> | 1" | |
| <i>Main rollers</i> | Rubber | |
| <i>Rear Rewind</i> | Integrated | |
| <i>Maximum temperature</i> | 122° F | |
| <i>Laminating Speed (feet/minute)</i> | 20 ft/min | |
| <i>Unwinds</i> | Top/Bottom | |
| <i>LinerRewind</i> | ChainDrive | |
| <i>Pressure Adjustment</i> | Hand Wheel | |
| <i>Tension Adjustment</i> | Single knob | |
| <i>Heat method</i> | Metal Alloy heater | |
| <i>Max. roll diameter</i> | 6" OD | |
| <i>Power Supply</i> | 120v 11A | |
| <i>Power Consumption</i> | 1300W | |
| <i>Foot Pedal</i> | Included | |
| <i>Stand with casters</i> | Included | |
| <i>Net Weight w/ stand</i> | 329 lbs. | 370 lbs. |
| <i>Dimensions</i> | 72" x 23.5" x 48.5" | 80" x 23" x 48" |
| <i>Shipping Dimensions</i> | 436 lbs. 79" x 26" x 31" | 507 lbs. 87" x 26" x 31" |

Warranty:

1 year parts & labor.
Installation is available.

cTUVus
 Safety
 Approval



Your local dealer is:



www.spiralbinding.com | (800)631-3572

