



## COMP COVER DATA

### PRODUCT COMPOSITION DOMESTIC

### INTERNATIONAL

<b>Base Material</b>	Dyed Through Kraft Paper – Coated 70% Mechanical Pulp / 30% Chemical Pulp Acid Free	Dyed though Kraft Paper Coated
<b>Surface Coating</b>		Aqueous Acrylic
<b>Average Weight</b>	332 gsm	204#(24x36)
<b>Average Thickness</b>	.015"	381 microns
<b>Process of Production</b>	Sulfate, Chemical Pulp or Mechanical Pulp	Sulfate, Chemical Pulp or Mechanical Pulp

### ROLL DIMENSIONS

#### DOMESTIC

#### INTERNATIONAL

<b>Width</b>	61"	1550 mm
<b>Length</b>	250 Yards	250 meters *not advised in rolls*
<b>Weight</b>	245 lbs	102 kgs
<b>Core Size (I.D)</b>	3"	7.62cm


### ORDERING INFO

#### DOMESTIC

#### INTERNATIONAL

<b>Minimum Order Qty(stock)</b>	100 Yards	500 Meters
<b>Minimum Order Qty(custom)</b>	100 Yards	3,000 meters per color
<b>Stock Sample Size (grain long)</b>	12" x 18" (Grain Long)	30.5 x 45.7cm (Grain Long)

### MATERIAL COMPOSITION BY WEIGHT

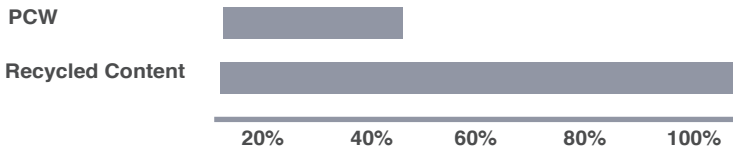

## APPLICATIONS



### Document Covers

### Decoration

Foil Stamp, Blind Stamp, and  
Silkscreen

### Recommended Gluing

Back & Face: Animal, Synthetic, Hot  
Melt

## SUSTAINABILITY