




P7200 and P7400 set up and operation

On the feed tray there is an inscription LS and there is a line beside the LS. You need to line the guides up with the lines both top, bottom, left and right. See Below.

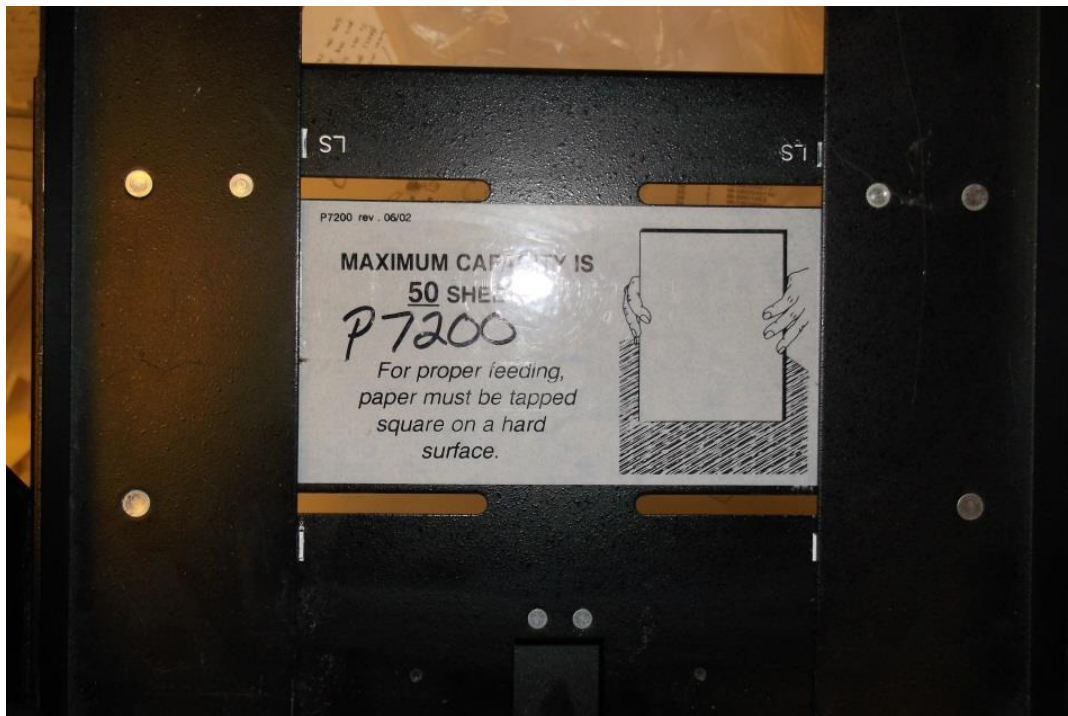

(the LS has been highlighted in this picture for better clarity)

The paper should slide down to the feed wheel easily but not shift left and right. If the guides are too tight, loosen one side so the paper slides between the guides without shifting.

Also, insure the second fold table is inserted over the top of the silver bar as shown.

The fold tables are NEVER inserted under the silver bar.





Fold tables must be inserted over the top of the silver bar.
NEVER under the silver bar.

When loading paper, fluff up to get air between the sheets then square up the pages then insert them into the feed tray.

The paper should be resting against the feed wheel.

Do not touch the paper once you turn on the machine.



When you use the bypass, only insert paper if the machine is at rest (the rollers cannot be turning).

Once you insert the paper, apply slight downward pressure on the top of the paper and press the start button.

Once the paper has gone through the machine and the machine rollers have stopped turning you can insert the next set.

